



RHINO COMPACT





A cost-effective solution, the Rhino Compact is designed for lower volume sites dealing with lighter material but retains the Rhino features of **robustness and versatility**.

A highly effective solution on the correct application, sometimes less is more.

- 4m Wash Platform with high performance spray configuration, longer platforms are available at customer's request.
- 9.4kw as standard with various pump configurations available.
- Only a 30kva generator required for standard spec.
- 15,000 litres of recycling as standard, larger options available on request or simply upgraded to 35,000 litre Rhino Multi tanks if required.
- At 2.5m the side screens are the highest of any standard wheelwash in production in the world and maximise water retention. Galvanized option available.
- Mobile unit able to be re-located on site in one day.
- Easy to clean 1-tank, directional settlement system.
- Wash Platform can be inset in the ground or truly surface mounted with no excavation required.
- Can be used with customers own settlement lagoons.
- The Rhino Compact is a fully adjustable, programmable system for changeable site conditions.
- All spraying products come with removable grids in the Wash Platform as standard. Wheelwash Ltd is the only company in the market to provide this essential feature.
- Flow-form covered tank for safety with optional handrail.
- 380 mm high wash platform provides a soft entry suitable for most vehicle types.
- Hassle free set up with delivery via Hiab crane truck.
- Heavy-duty steel construction.
- All Wheelwash Ltd products are designed and manufactured in Britain.

Product Specification

RHINO COMPACT

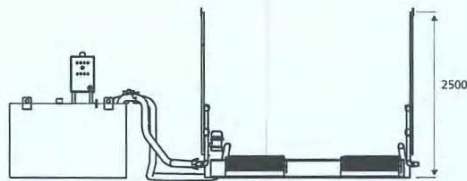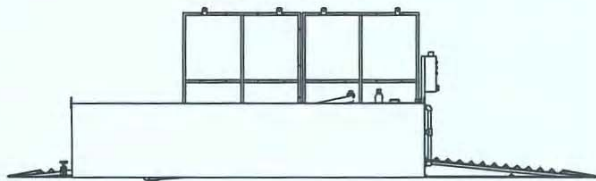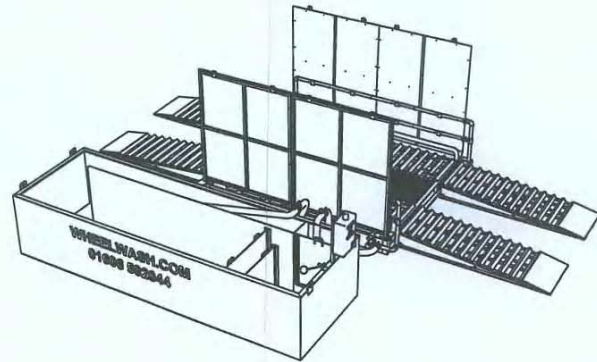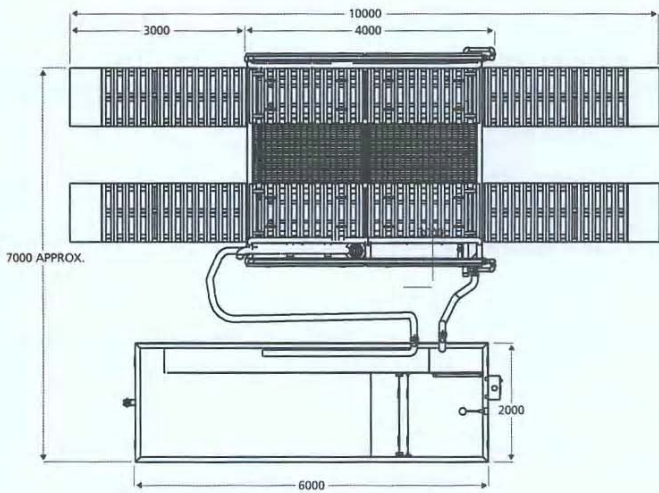

All Dimensions in Millimetres

Rhino Compact 4000

Main Components

Wash Platform	4000mm x 3500mm x 380mm 2205 Kgs 2650 Litres Capacity
Ramp (Each & Optional)	3000mm x 1000mm x 380mm 295 Kgs
Mobile Road (Each & Optional)	3000mm x 1000mm x 380mm 325 Kgs
Settlement Tank	6000mm x 2000mm x 1250mm 2150 Kgs 15000 Litres Capacity
Side Screens (Each)	4 Off 2500mm x 2000mm x 2mm 110 Kgs (each)

Power Supply Required

Mains Power	415v 63amp Supply D Type Circuit Breaker
Generator	30 kVA

Wash Pump Specification

Rating (kw)	9.4
Flow Rate (Ltr/ Min)	760
Pressure (bar)	3

Waste Pump Specification

Rating (kw)	5.2
Flow Rate (Ltr/ Min)	1440

Supply / Nozzles

Water Inlet Required	25mm or 50mm
Spray Nozzles	Up to 80

*All weights are approximate dry weights. Wheelwash Limited reserves the right to change detailed specifications from time to time. Drawings are to show indicative layouts only and are not to scale. Specifications are based on supply within the UK, please ask for details outside of this location. Specifications may vary when systems supplied as rental units.